

SUBMITTAL INFORMATION





MALE IRON PIPE THREAD INLET AND OUTLET - FOR 1" METER

SINGLE LID - ANGLE BALL METER VALVE INLET BY ANGLE DUAL CHECK VALVE OUTLET

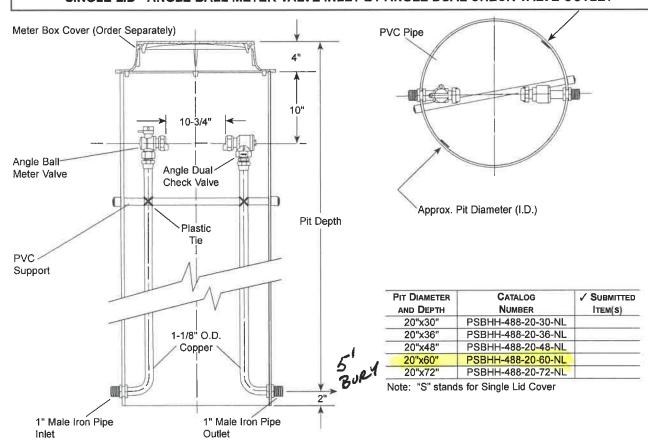

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS C89833)
- · The products has the letters "NL" cast into the body for proper identification
- Brass components that do not come in contact with potablewater conform to AWWA Standard C800 (ASTM B-62 and ASTM B584, UNS C83600-85-5-5-5
- All Ford Setters are assembled with lead-free solder.
- · Meter is held rigidly and at the proper height for easy installation and removal.
- · Meter Box Cover not included. Must be ordered separately.
- Service lines are a minimum of 2" from pit walls to prevent "frost jump" in colder climates.
- · Easy installation simply make inlet and outlet connections and install cover.
- When bottom of pit is below frost line, service and meter freeze-ups are greatly reduced or eliminated by the circulation of air from the warmer soil at the pit base.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487


Overseas Fax: 260-563-0167 http://www.fordmeterbox.com

02/14/13


Submitted	By.
-----------	-----

SUBMITTAL INFORMATION

Insulating Disc - (CCID-xx style)



INSULATING DISC FOR 15", 18", 20" AND 24" DIAMETER TILE

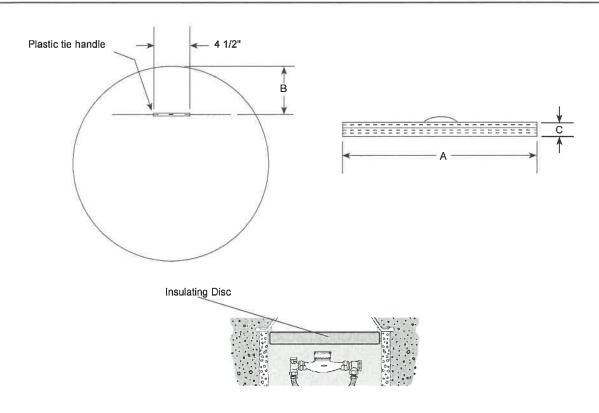

DIMENSION A	DIMENSION B	DIMENSION C DISC HEIGHT	PRODUCT NUMBER	✓ SUBMITTED ITEM(S)	
15"	4-1/2"		CCID-15		
18"	4-1/2"	1-1/2"	CCID-18		
20"	5"	1-1/2	CCID-20		
24"	6"		CCID-24		

FEATURES

- · Closed-cell polyethylene foam resists moisture absorption
- Provides extra protection against meter freeze-ups
- · Plastic tie strap handle to assist in disc removal
- 1-1/2" thick, value of R4/in

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487


Overseas Fax: 260-563-0167

http://www.fordmeterbox.com

Submitted By:


1	1	l	0	9	1	0	9

SUBMITTAL INFORMATION





11-1/2" OVERLAPPING LID WITH RECESSED HOLE FOR EMRM

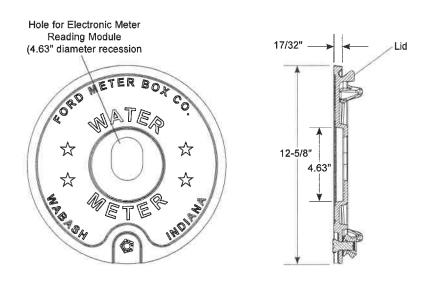

*LID SIZE	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
11-1/2"	12.1	C3L-C-REC463-T	1 2

^{*} Lid size indicates approximate pit access opening; actual lid diameter is approximately 1" larger.

FEATURES

- Standard pentagon bolt furnished with locking lids
 Larger size is available. Add "-LB" to catalog number
- · Lid has a precast hole (with a surrounding recession) for an electronic meter reading module
- · Lid is cast iron per ASTM A48, Class 25
- Finish is black Armorguard e-coat epoxy

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

Submitted By:

01/19/18